


## adaptateur de jeu de barres 32 A (32408)

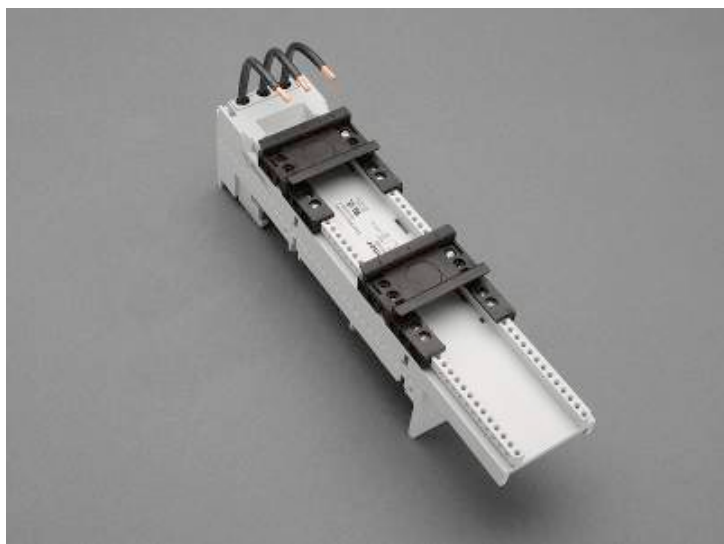

The picture may show a similar product.

### Description

Référence **32408 000**

EQUES® 60Classic

adaptateur de jeu de barres 32 A

3 pôles

2 rails DIN réglables

54 x 260, avec partie supérieure amovible et câbles AWG 10 (6 mm<sup>2</sup>)

pour jeux de barres 12, 15, 20, 25, 30 x 5, 10 et barres profilées

avec CrossLink®Technology

### Système

60Classic

### Avantages produit

Conductor ends ultrasonically sealed.

Click mechanism when pushing onto the busbar.

Groupe de produits 05

Sous-groupe 22

Dimensions de l'emballage 4  
EAN 4021267324087

ECLASS 6.1 27370304  
ECLASS 7.1 27370304  
ETIM 4.0 EC001531  
ETIM 5.0 EC001531

## Homologations

### Normes

IEC 61439-1:2020  
UL 508

### Approbations

CSA , UL



for UL feeder circuits >250V

Type: EMC6032-L

UL file: E123577, UL category (for USA): NMTR <https://www.ul.com>  
UL file: E123577, UL category (for Canada): NMTR7 <https://www.ul.com>  
CSA file: 110285, CSA class: 3211-37 <https://directories.csa-international.org>  
Homologation CCC: no certification required

## Données techniques

### Details IEC

#### Normes

IEC 61439-1:2020

#### Electrical data IEC

Courant assigné (IEC): 32 A  
Tension assignée (IEC) CA: 690 V

rated isolation voltage  $U_i$  AC: 800 V  
Tension assignée de tenue aux chocs  $U_{imp}$ : 6 kV

power dissipation of the article:  
The power dissipation at a typical load of 80 % results to 2,2 W.  
(The power dissipation at full load would be 3,5 W.)

## Details UL

### Normes

UL 508

for UL feeder circuits >250V

### Electrical data UL

rated current (UL): 30 A  
rated voltage (UL) AC: 600 V  
rated frequency (UL): 50 / 60 Hz

SCCR unprotected max.: 5 kA  
3 cycles (without OPD) @ 600 V AC

## Caractéristiques mécaniques


L x H x P: 54 x 260 x 75  
Poids: 54,4 kg/100  
Pôles: 3 pôles  
pour jeux de barres: 12, 15, 20, 25, 30 x 5, 10 et barres profilées

## Application notes

There must be a clearance of at least 12 mm above the article to remove it from the busbar system.  
For compact mounting of complete motor circuits with commercially available switchgear and safe mechanical and electrical connection to the busbar system. In the test position, the structure locks and disconnects safely from the primary energy supply.  
the short-circuit capacity of the combination of adapter and motor starter depends on the motor starter  
for UL feeder circuits >250V

## Accessoires

accessories for mounting




**32969 000**  
arrêt de rail DIN


further accessories



**32948 000**  
rail DIN 54 mm  
pour adaptateurs de jeux de barres



**32964 000**  
module pour montage latéral pour adaptateurs de jeu de barres  
encliquetable des deux côtés  
9 x 200  
pour: EMC60..



**32956 000**  
contact de signalisation  
1 N/C



**32953 000A**  
pièce de positionnement pour Siemens S2

<https://pim.woehner.de/FR/FR/1000042942>