


adaptateur de jeu de barres 32 A (32404)

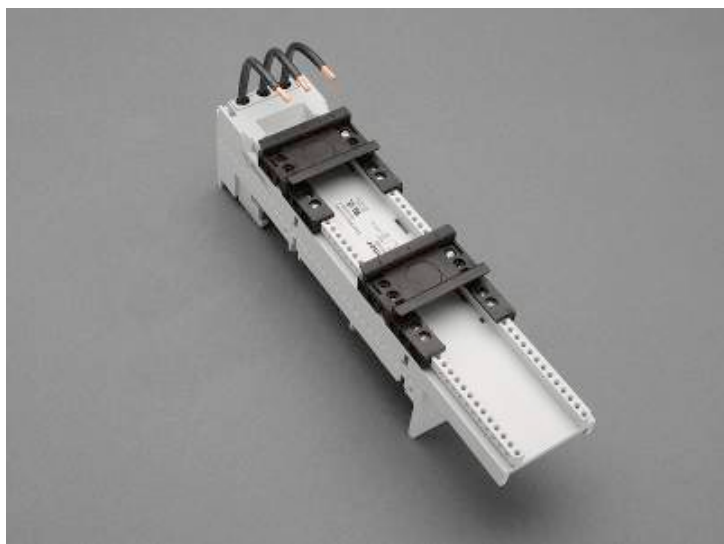

The picture may show a similar product.

Description

Référence **32404 000**

EQUES® 60Classic

adaptateur de jeu de barres 32 A

3 pôles

2 rails DIN réglables

54 x 200, avec partie supérieure amovible et câbles AWG 10 (6 mm²)

pour jeux de barres 12, 15, 20, 25, 30 x 5, 10 et barres profilées

avec CrossLink®Technology

Système

60Classic

Avantages produit

Conductor ends ultrasonically sealed.

Click mechanism when pushing onto the busbar.

Groupe de produits 05

Sous-groupe 22

Dimensions de l'emballage 4
EAN 4021267324049

ECLASS 6.1 27370304
ECLASS 7.1 27370304
ETIM 4.0 EC001531
ETIM 5.0 EC001531

Homologations

Normes

IEC 61439-1:2020
UL 508

Approbations

CSA , UL



for UL feeder circuits >250V

Type: EMC6032-L

UL file: E123577, UL category (for USA): NMTR <https://www.ul.com>
UL file: E123577, UL category (for Canada): NMTR7 <https://www.ul.com>
CSA file: 110285, CSA class: 3211-37 <https://directories.csa-international.org>
Homologation CCC: no certification required

Données techniques

Details IEC

Normes

IEC 61439-1:2020

Electrical data IEC

Courant assigné (IEC): 32 A
Tension assignée (IEC) CA: 690 V

rated isolation voltage U_i AC: 800 V
Tension assignée de tenue aux chocs U_{imp} : 6 kV

power dissipation of the article:
The power dissipation at a typical load of 80 % results to 2,2 W.
(The power dissipation at full load would be 3,5 W.)

Details UL

Normes

UL 508

for UL feeder circuits >250V

Electrical data UL

rated current (UL): 30 A
rated voltage (UL) AC: 600 V
rated frequency (UL): 50 / 60 Hz

SCCR unprotected max.: 5 kA
3 cycles (without OPD) @ 600 V AC

Caractéristiques mécaniques


L x H x P: 54 x 200 x 75
Poids: 49,2 kg/100
Pôles: 3 pôles
pour jeux de barres: 12, 15, 20, 25, 30 x 5, 10 et barres profilées

Application notes

There must be a clearance of at least 12 mm above the article to remove it from the busbar system.
For compact mounting of complete motor circuits with commercially available switchgear and safe mechanical and electrical connection to the busbar system. In the test position, the structure locks and disconnects safely from the primary energy supply.
the short-circuit capacity of the combination of adapter and motor starter depends on the motor starter
for UL feeder circuits >250V

Accessoires

accessories for mounting




32969 000
arrêt de rail DIN


further accessories



32948 000
rail DIN 54 mm
pour adaptateurs de jeux de barres



32964 000
module pour montage latéral pour adaptateurs de jeu de barres
encliquetable des deux côtés
9 x 200
pour: EMC60..



32956 000
contact de signalisation
1 N/C



32953 000A
pièce de positionnement pour Siemens S2

<https://pim.woehner.de/FR/FR/1000254618>