


EB2 1000/3LE 1000A 3p

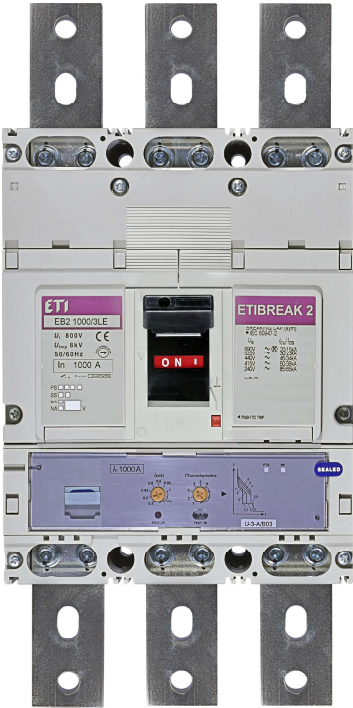

Specifications

ETI Code	004672210
Description	EB2 1000/3LE 1000A 3p
Class name	Molded Case Circuit Breaker
Rated current (A)	1000
Number of poles	3
Catalogue Group	EB2
Standards	60947
Connection type	extension bars
Rated impulse withstand voltage Uimp (kV)	8
Rated operational voltage AC (V)	690V
Rated insulation voltage (V)	800
Rated short-circuit breaking capacity at 415V Icu/Ics (kA)	50/38
Rated operational voltage DC (V)	n.a.
Thermal adjustment	0,4-1
Magnetic adjustment	adjustable
Adjustable or fixed	adjustable

Online product page [🔗](#)

Other documentation



3D Model

Instruction manual

CE declaration

Eplan file

ETIM international clasification

Classification	EC000228
Class name	Power circuit-breaker for trafo/generator/installation protection
Rated permanent current I _u	1000A
Rated short-circuit breaking capacity I _{cu} at 400 V, 50 Hz	50kA
Overload release current setting	400...1000A
Adjustment range short-term delayed short-circuit release	1000...8000A
Adjustment range undelayed short-circuit release	5600...10000A
Type of electrical connection of main circuit	Screw connection
Device construction	Built-in device fixed built-in technique
With switched-off indicator	1
Number of poles	3
Type of control element	Rocker lever
Motor drive integrated	
Motor drive optional	1
Degree of protection (IP)	IP20