

MODULAR CONTACTOR R63-.. 4-pole, low noise

Technical Data acc. to IEC/EN60947-4-1, IEC/EN60947-5-1, VDE 0660

Type R63..

Main Contacts 1) 2) 3)

Rated insulation voltage U_i	V~	440 ⁴⁾
Rated operation voltage U_e	V~	440
Frequency of operations z	AC1, AC3	1/h 600
Mechanical life	S x 10 ⁶	1

Utilization category AC1 / AC7a, Switching of resistive load

Rated operational current $I_e (=I_{th})$	open	at 60°C	A	63
Contact life			S x 10 ⁶	0,1
Minimum switch voltage		10s-current	V/mA	24/100
Short time current			A	240
Power loss per pole at $I_e/AC1$			W	7

Utilization category AC2 and AC3 / AC7b, Switching of three-phase motors

Rated operational current I_e	A	30
Rated operational power	220V	kW 8
50-60Hz	230-240V	kW 8,5
	380-415V	kW 15

Contact life	S x 10 ⁶	0,15
--------------	---------------------	------


Power consumption of coils

AC operated	inrush	VA	33-45
	sealed	VA	6-8
		W	2,6

Operation range of coils

in multiplies of control voltage U_s	-40°C to +40°C	0,85-1,1
--	----------------	----------

Maximum ambient temperature

 ≤ 40°C	open	°C	-40 to +60
 40-60°C	enclosed	°C	-40 to +40

Storage

		°C	-50 to +90
--	--	----	------------

Short circuit protection

Max. fuse Coordination-type "1"	gL (gG)	A	80
Rated short circuit current	"r"	kA	3
	"Iq"	kA	10

Switching time at control voltage $U_s \pm 10\%$

	make time	ms	11-15
	release time	ms	6-13
	arc duration	ms	10-15

Cable cross-sections

Main connector	solid or stranded flexible	mm ²	2,5-25
	flexible with multicore cable end	mm ²	2,5-16
		mm ²	2,5-16
		1	
Clamps per pole	solid or stranded flexible	mm ²	0,75-2,5
Magnetic coil	flexible with multicore cable end	mm ²	0,5-2,5
		mm ²	0,5-1,5
		1	
Clamps per pole	solid or stranded flexible	mm ²	0,75-2,5mm ²
	flexible with multicore cable end	mm ²	0,5-2,5mm ²
		mm ²	0,5-1,5mm ²
		1	

Auxiliary Contacts 1) 2) 3)

Rated insulation voltage U_i	V~	440 ⁴⁾
Thermal rated current = I_{th}	40°C	A 63
Ambient temperature	60°C	A 63

Utilization category AC15

Rated operational current I_e	220-240V	A	3
	380-415V	A	2
	440V	A	1,6

Utilization category DC13

Rated operational current I_e per pole	24-60V	A	2
	110V	A	0,4
	220V	A	0,1



Short circuit protection

Short-circuit current 1kA, contact welding not accepted, max. fuse size	gL (gG)	A	10
---	---------	---	----



Symbol picture

Wiring diagrams

R63-40	
R63-31	
R63-22	
R63-04	

Weight

0,36kg

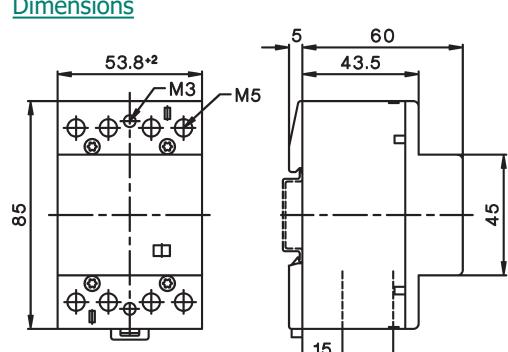
Coil voltages

R63-.. 230	220-240V 50Hz / 230-264V 60Hz
R63-.. 24	24V 50/60Hz
R63-.. 200FR	180-210V 50Hz / 200-240V 60Hz

Cable cross-sections, screw driver, tightening torque

 2,5-25mm ²	Pz2 (M5)
 2,5-16mm ²	2,5-3Nm 14-3AWG 22-26lb.inch
 0,75-2,5mm ²	Pz2 (M3)
 0,5-2,5mm ²	0,6-1,2Nm 20-14AWG 5-11lb.inch

Dimensions



1) Rated frequency 50/60Hz

2) Max. occ switching overvoltage < 4kV

3) Duty cycle: 100%

4) Suitable for: earthed-neutral systems, overvoltage category I to III, pollution degree 3 (standard-industrie): Uimp = 4kV

Technical data are subject to change without notice

Benedict GmbH
Liebgasse 7, A-1220 Vienna Tel.: +43 1 251 51-0
Fax: +43 1 251 51-89

e-mail: sales@benedict.at
www.benedict.at

 BENEDICT
GMBH
www.benedict.at