


TECHNICAL CHARACTERISTICS

Material: tinned copper CU-ETP EN 13602
Standard wire: Ø 0.20 mm
Resistivity: 0.0172 Ωmm²/m

FLAT TINNED COPPER EARTHING BRAIDS

Code	Reference		Weight (kg)	Intensity* (A)	Sect. (mm ²)	S (mm)	L (mm)	A (mm)	B (mm)	C (mm)	ØD (mm)
TMS1000	TMS 6-150-6	10	0,010	57	6	2	150	10,5	10	6	6,5
TMS1005	TMS 6-200-6	10	0,013	57	6	2	200	10,5	10	6	6,5
TMS1010	TMS 10-150-8	10	0,021	86	10	2,1	150	17	22	9	8,5
TMS1015	TMS 10-200-8	10	0,025	86	10	2,1	200	17	22	9	8,5
TMS1020	TMS 10-250-8	10	0,029	86	10	2,1	250	17	22	9	8,5
TMS1025	TMS 10-300-8	10	0,033	86	10	2,1	300	17	22	9	8,5
TMS1030	TMS 16-100-8	10	0,023	115	16	2,6	100	17	22	9	8,5
TMS1035	TMS 16-150-8	10	0,030	115	16	2,6	150	17	22	9	8,5
TMS1040	TMS 16-200-8	10	0,037	115	16	2,6	200	17	22	9	8,5
TMS1045	TMS 16-250-8	10	0,046	115	16	2,6	250	17	22	9	8,5
TMS1050	TMS 16-300-8	10	0,054	115	16	2,6	300	17	22	9	8,5
TMS1055	TMS 25-150-10	10	0,048	152	25	2,8	150	21	22	11	10,5
TMS1060	TMS 25-200-10	10	0,059	152	25	2,8	200	21	22	11	10,5
TMS1065	TMS 25-250-10	10	0,072	152	25	2,8	250	21	22	11	10,5
TMS1070	TMS 25-300-10	10	0,084	152	25	2,8	300	21	22	11	10,5
TMS1075	TMS 35-150-10	10	0,061	192	35	3,6	150	21	22	11	10,5
TMS1080	TMS 35-200-10	10	0,077	192	35	3,6	200	21	22	11	10,5
TMS1085	TMS 35-250-10	10	0,097	192	35	3,6	250	21	22	11	10,5
TMS1090	TMS 35-300-10	10	0,110	192	35	3,6	300	21	22	11	10,5
TMS1095	TMS 50-100-10	10	0,080	244	50	4,8	100	25,5	25	12,5	10,5
TMS1100	TMS 50-150-10	10	0,095	244	50	4,8	150	25,5	25	12,5	10,5
TMS1105	TMS 50-200-10	10	0,129	244	50	4,8	200	25,5	25	12,5	10,5
TMS1110	TMS 50-250-10	10	0,143	244	50	4,8	250	25,5	25	12,5	10,5
TMS1115	TMS 50-300-10	10	0,179	244	50	4,8	300	25,5	25	12,5	10,5
TMS1120	TMS 75-200-10	10	0,185	323	75	5,5	200	30	30	15	10,5
TMS1125	TMS 75-250-10	10	0,225	323	75	5,5	250	30	30	15	10,5
TMS1130	TMS 75-300-10	10	0,265	323	75	5,5	300	30	30	15	10,5
TMS1135	TMS 100-200-12	10	0,250	365	100	6,5	200	30	30	15	12,5
TMS1140	TMS 100-250-12	10	0,300	365	100	6,5	250	30	30	15	12,5
TMS1145	TMS 100-300-12	10	0,375	365	100	6,5	300	30	30	15	12,5

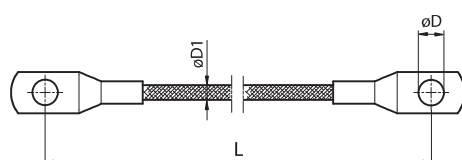

TECHNICAL CHARACTERISTICS

Material: tinned copper CU-ETP EN 13602
Standard wire: Ø 0.20 mm
Resistivity: 0.0172Ω mm²/m

ROUND TINNED COPPER EARTHING BRAIDS

Ring lugs as per DIN 46234

Code	Reference		Weight (kg)	Intensity* (A)	Sect. (mm ²)	ØD1 (mm)	L (mm)	ØD (mm)
TMT1200	TMT 6-150-6	10	0.0125	57	6	4	150	6.5
TMT1205	TMT 6-200-6	10	0.0154	57	6	4	200	6.5
TMT1210	TMT 10-300-6	10	0.0312	86	10	5	300	6.5

*Intensity calculated with a temperature rise of 35 °C and an ambient temperature of 35 °C.