

# MODULAR CONTACTOR R25-..VM, 4-pole, hum free





Technical Data acc. to IEC/EN60947-4-1, IEC/EN60947-5-1, VDE 0660

	Type	R25..
<b>Main Contacts</b> <sup>1) 2) 3)</sup>		
Rated insulation voltage $U_i$	V~	440 <sup>4)</sup>
Rated operation voltage $U_e$	V~	440
Frequency of operations $z$	AC1, AC3	1/h 300
Mechanical life	S x 10 <sup>6</sup>	1
<b>Utilization category AC1 / AC7a, Switching of resistive load</b>		
Rated operational current $I_e (=I_{th})$	open	at 60°C A 25
Contact life		S x 10 <sup>6</sup> 0,1
Minimum switch voltage		V/mA 24/100
Short time current	10s-current	A 72
Power loss per pole at $I_e/AC1$		W 2
<b>Utilization category AC2 and AC3 / AC7b, Switching of three-phase motors</b>		
Rated operational current $I_e$		A 9
Rated operational power	220V	kW 2,2
50-60Hz	230-240V	kW 2,5
	380-415V	kW 4
Contact life		S x 10 <sup>6</sup> 0,15
<b>Power consumption of coils</b>		
AC and DC operated		W 3-4
<b>Operation noise acc. to EN ISO 3744</b>		
	from front, distance 0,5m	dB 0
<b>Operation range of coils</b>		
in multiplies of control voltage $U_s$		-40°C to +40°C 0,85-1,1
<b>Maximum ambient temperature</b>		
 ≤ 40°C	 40-60°C	open °C -40 to +60 enclosed °C -40 to +40
Storage		°C -50 to +90
<b>Short circuit protection</b>		
Max. fuse Coordination-type "1"	gL (gG)	A 35
Rated short circuit current	"r"	kA 3
	"Iq"	kA 10
<b>Switching time at control voltage <math>U_s ± 10\%</math></b>		
	make time ms	17-50
	release time ms	17-23
	arc duration ms	10-15
<b>Cable cross-sections</b>		
Main connector	solid or stranded flexible	mm <sup>2</sup> 1,5-10
		mm <sup>2</sup> 1,5-6
	flexible with multicore cable end	mm <sup>2</sup> 1,5-6
Clamps per pole		1
Magnetic coil	solid or stranded flexible	mm <sup>2</sup> 0,75-2,5
		mm <sup>2</sup> 0,5-2,5
	flexible with multicore cable end	mm <sup>2</sup> 0,5-1,5
Clamps per pole		1
<b>Auxiliary Contacts</b> <sup>1) 2) 3)</sup>		
Rated insulation voltage $U_i$	V~	440 <sup>4)</sup>
Thermal rated current = $I_{th}$	40°C A 25	
Ambient temperature	60°C A	25
<b>Utilization category AC15</b>		
Rated operational current $I_e$	220-240V	A 3
	380-415V	A 2
	440V	A 1,6
<b>Utilization category DC13</b>		
Rated operational current $I_e$ per pole	24-60V	A 2
	110V	A 0,4
	220V	A 0,1
<b>Short circuit protection</b>		
Short-circuit current 1kA, contact welding not accepted, max. fuse size	gL (gG)	A 10



Symbol picture

## Wiring diagrams

R25-40VM	
R25-31VM	
R25-13VM	
R25-22VM	
R25-04VM	

## Gewicht

0,22kg

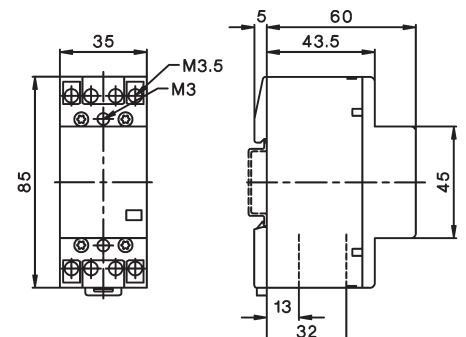
## Coil voltages

R25-.. 24VM	24V 50/60Hz, 24V=DC
R25-.. 230VM	220-240V 50/60Hz, 220V=DC

## Cable cross-sections, screw driver, tightening torque

 2,5-25mm <sup>2</sup>	Pz2 (M5)
 2,5-16mm <sup>2</sup> 15mm	2,5-3Nm 22-26lb.inch
 0,75-2,5mm <sup>2</sup>	Pz2 (M3)
 0,5-2,5mm <sup>2</sup> 9mm	0,6-1,2Nm 5-11lb.inch

## Dimensions



1) Rated frequency 50/60Hz

2) Max. occ switching overvoltage < 4kV

3) Duty cycle: 100%

4) Suitable for: earthed-neutral systems, overvoltage category I to III, pollution degree 3 (standard-industrie): Uimp = 4kV

Technical data are subject to change without notice