


Product Datasheet

CFX6004

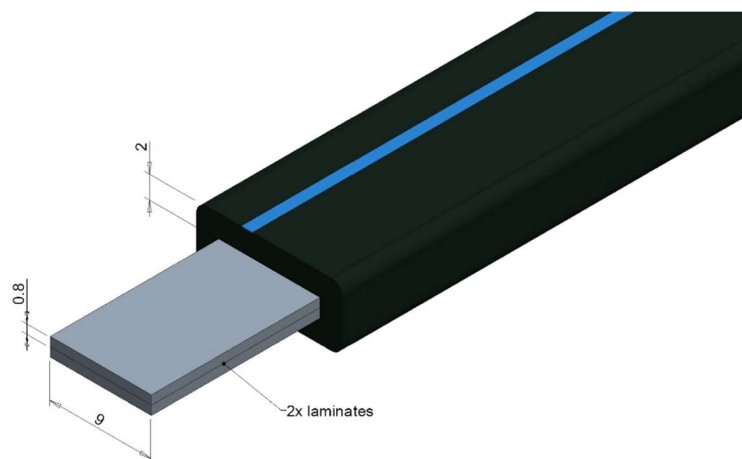

Main

Family	Insulated copper flexible bars	
Version	Coflex Plus	
Standard length (m)	3	
Width (mm)	9	
Code	CFX6004	
Reference	CFP 2X9X0.8	
Number per package	n.a.	
Weight (kg)	0.75	
Cross section (mm ²)	14.4	
In (A) vs ΔT	Rated Intensity (A)	Temperature rise ΔT
	107	35 °C
	137	55 °C
	156	70 °C
	193	105 °C

Technical Features

Conductor

Tinned electrolytic copper: Cu-ETP – EN 13599

Laminate thickness: 0.8 mm

Insulation

TPE compound

Black color with a light blue line

Low smoke emission

Self-extinguishing UL 94-V0

Halogen free

Thickness: 1,9 mm $\pm$ 0,2 mm

Dielectric rigidity: 20 kV/mm

Class II according to Par. 8.4.4 IEC 61439-1

Recyclable

Finished Product

Rated voltage: 1000 V AC/1500 V DC

Working temperature: -40 °C to 140 °C

In vs. ΔT

I_n = Rated current A

ΔT = Temperature rise °C

$\Delta T = T_f - T_a$

T_f = Working temperature °C

T_a = Room temperature °C

Table of ampacities (A) are based on temperature rise ΔT as per **IEC 61439-1** with reference to the room temperature of 35°C.

For derating coefficient for the use of bars in parallel please refer to the catalogue.

Please contact Teknomega for non-specified tolerances.