
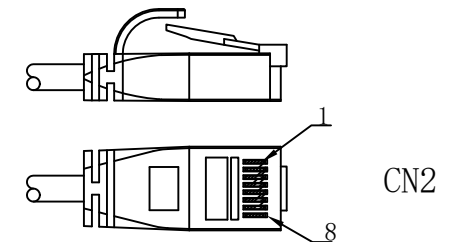


	REVISION	DATE	REV
	NEW	2023/12/07	A/0

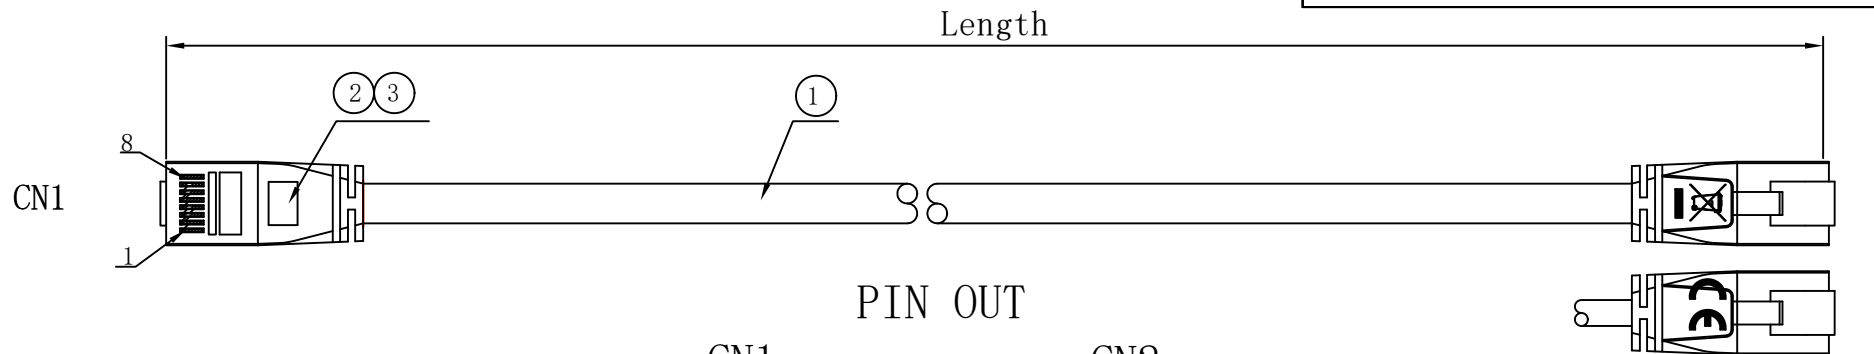

PIN OUT

CN1			CN2	
568B			568B	
WHITE	1		1	WHITE
ORANGE	2		2	ORANGE
WHITE	3		3	WHITE
GREEN	6		6	GREEN
BLUE	4		4	BLUE
WHITE	5		5	WHITE
WHITE	7		7	WHITE
BROWN	8		8	BROWN
SHELL		E+B	SHELL	

Length

250 ± 10mm
300 ± 20mm
500 ± 20mm
1000 ± 30mm
1500 ± 30mm
2000 ± 30mm
3000 ± 50mm
4000 ± 100mm
5000 ± 100mm
7500 ± 100mm
10000 ± 100mm

MATERIAL LIST:

NOTE:

1. Electrical test:

- (1).100% OPEN SHORT & MISS WIRE TEST;
- (2).Insulation resistance: DC 200V 10M Ω MIN;
- (3).Connect resistance: L $\leq$ 3M 3 Ω MAX;
L>3M 1 Ω /M MAX;

2. RoHS & REACH Compliant

3.PRINT WORD: E513066 AWM 2835 60°C 30V CAT.6A S/FTP
SLIM 500 MHz ISO/IEC 11801 & ANSI/TIA-568-C.2 #617# mm|yyyy
Wentronic GmbH| Pillmannstraße 12| 38112| Braunschweig Germany
4.FLUKE TEST: ISO11801 Channel Class Ea

③	OVER MOLD	PVC COLOR/GREY(RAL7001)	2		DRAWING	BD-ZQH0074	PART NAME	CAT. 6A S/FTP 8P8CS TO 8P8CS		
②	CONNECTOR	RJ45 8P8C Shielded Plug,The Pin Gold Plated,The Shell Gold Plated,Transparent;	2		CUSTOMER	WEC		ICON	TOLERANCE	
①	CABLE	CAT. 6A S/FTP 32AWG (7/0.08BC*1P+A)*4+E+B E=7/0.10BC B=0.12mm/4*16 AL-MG JACKET: PVC/GREY(RAL7001) UL OD:4.3±0.2mm	1		CUSTOMER'S ITEM				X. ±1.00	
							X. X ±0.50			
					APPRO BY		CHECK BY	DRAWN BY	UNIT	MM
NO	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK	He Jianhong		He Jianhong	Zhouqinghua	PAGE	1/1