

- (D) ϵ^5 - NH-Sicherungs-Lastschaltleiste 00/185 mm
- (GB) ϵ^5 - NH Fuse-Switches, vertical design 00/185 mm
- (PL) ϵ^5 - NH Rozłącznik bezpiecznikowy listwowy nn 00/185 mm
- (ES) ϵ^5 - NH Interruptor-Seccionador vertical para fusible 00/185 mm
- (RU) ϵ^5 - NH Предохранитель-выключатель нагрузки-разъединитель вертикальной конструкции размера 00/185 мм

(D)

- Sicherungseinsätze und Trennmesser mit versilberten Oberflächen einsetzen.
- Zügig schalten

(GB)

- Use silver-coated fuse-links and solid links.
- operate quickly.

(PL)

- Wkładki bezpiecznikowe oraz zwieracze nożowe stosuj wyłącznie srebrzone
- Łączyć szybko


(ES)

- utilizar fusibles de cuchilla con contactos plateados
- rapida maniobra


(RU)

- применять предохранители и разъединительные ножи только с посеребрёнными контактами
- включать и разъединять быстро


EN/IEC 60947-3
VDE 0660 T107

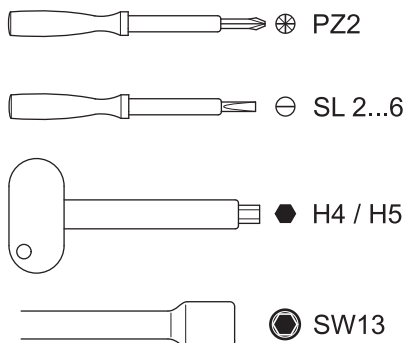


1P

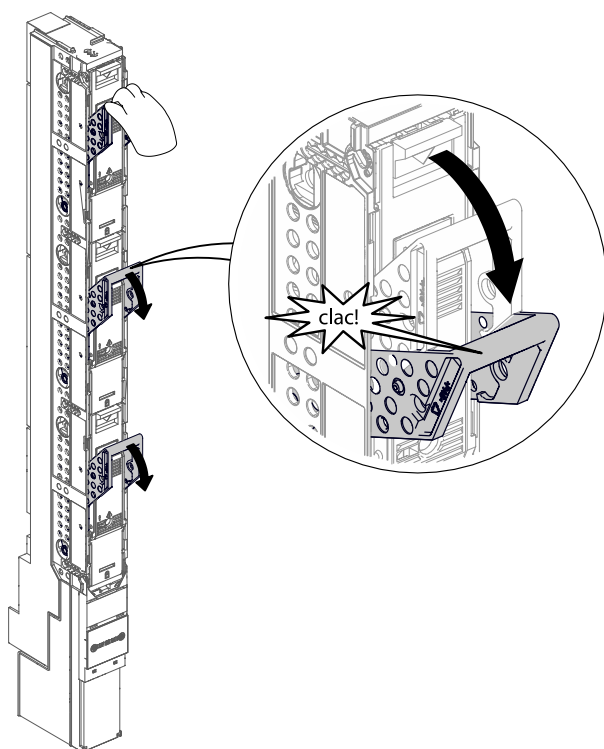




1P




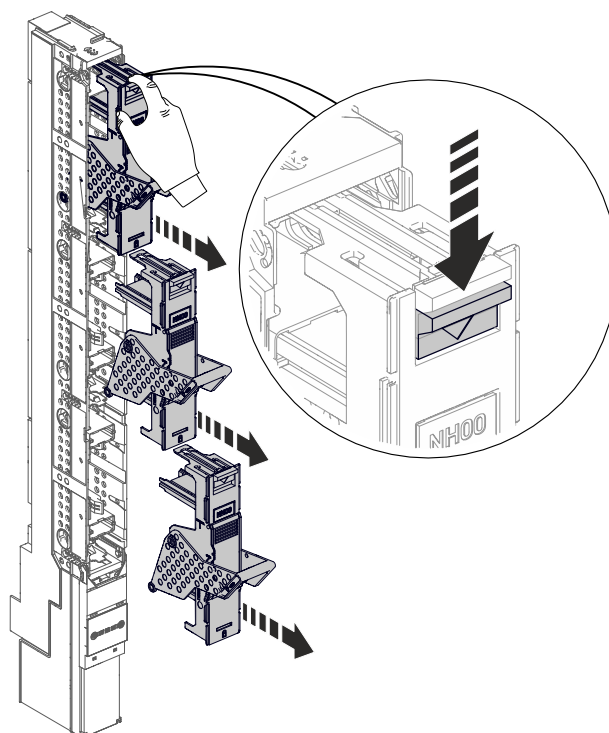






3P

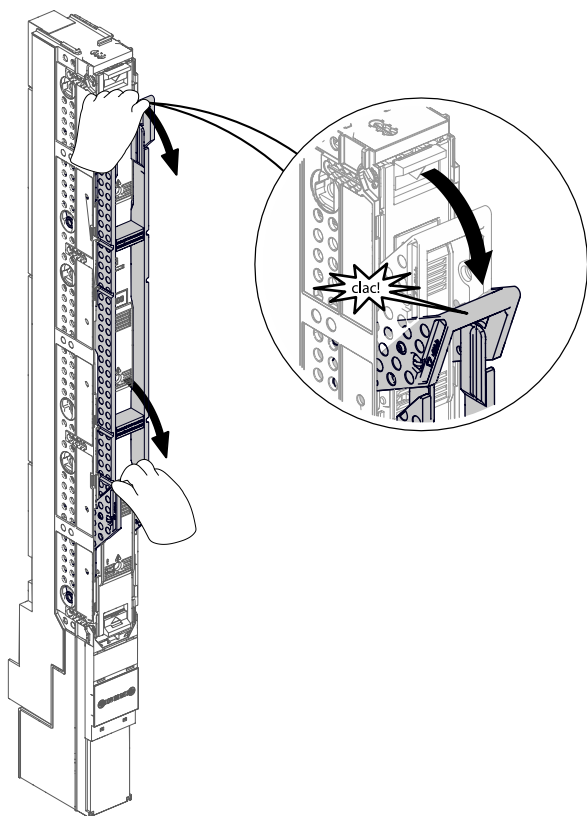


3P

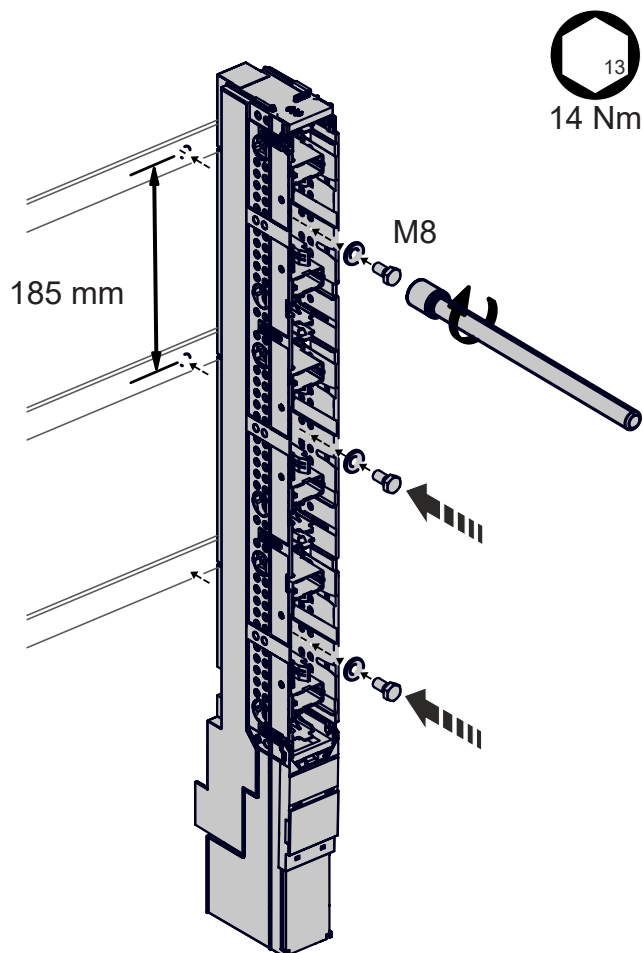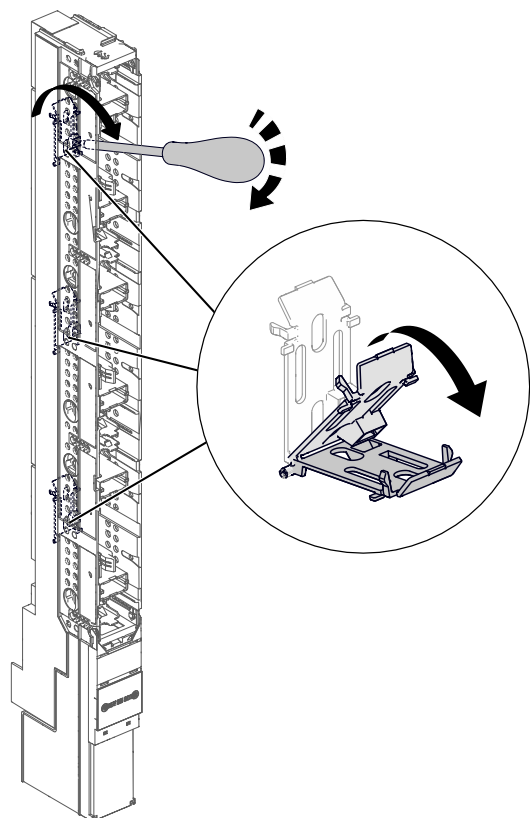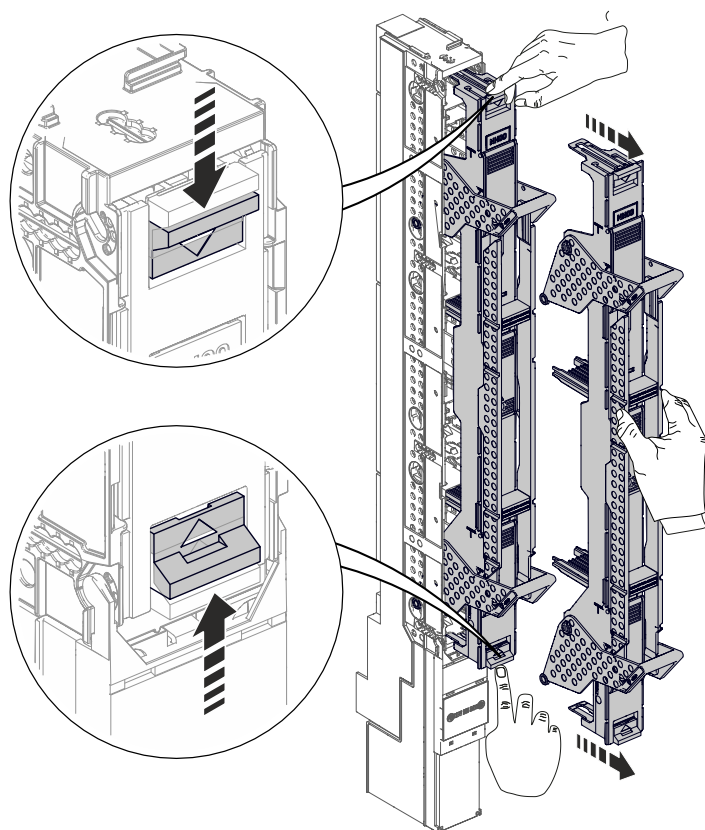


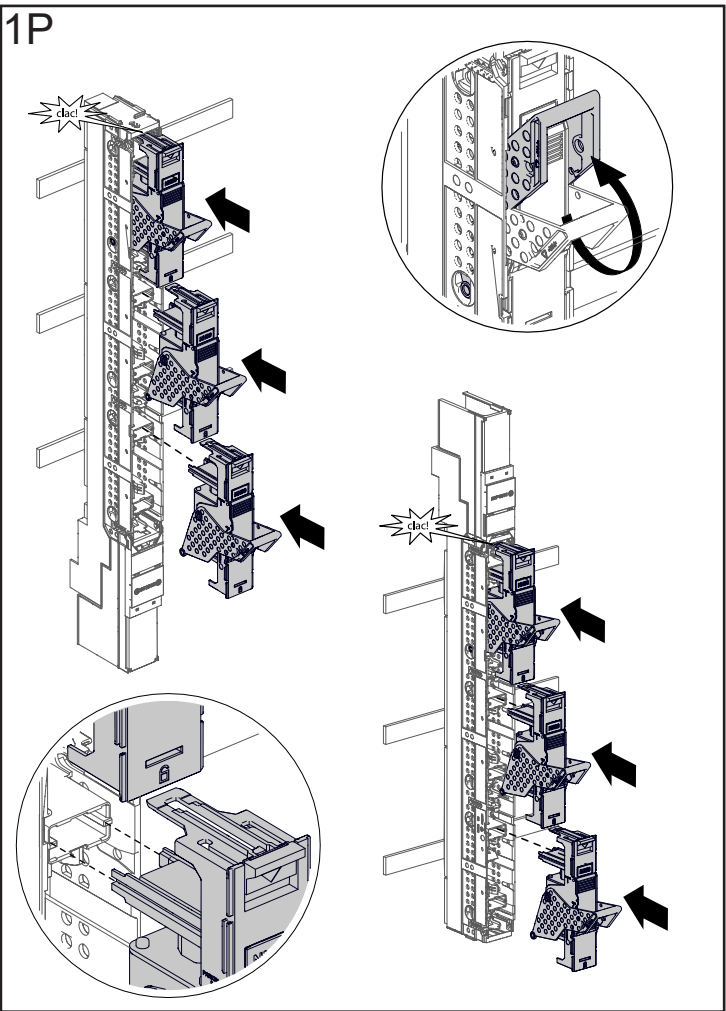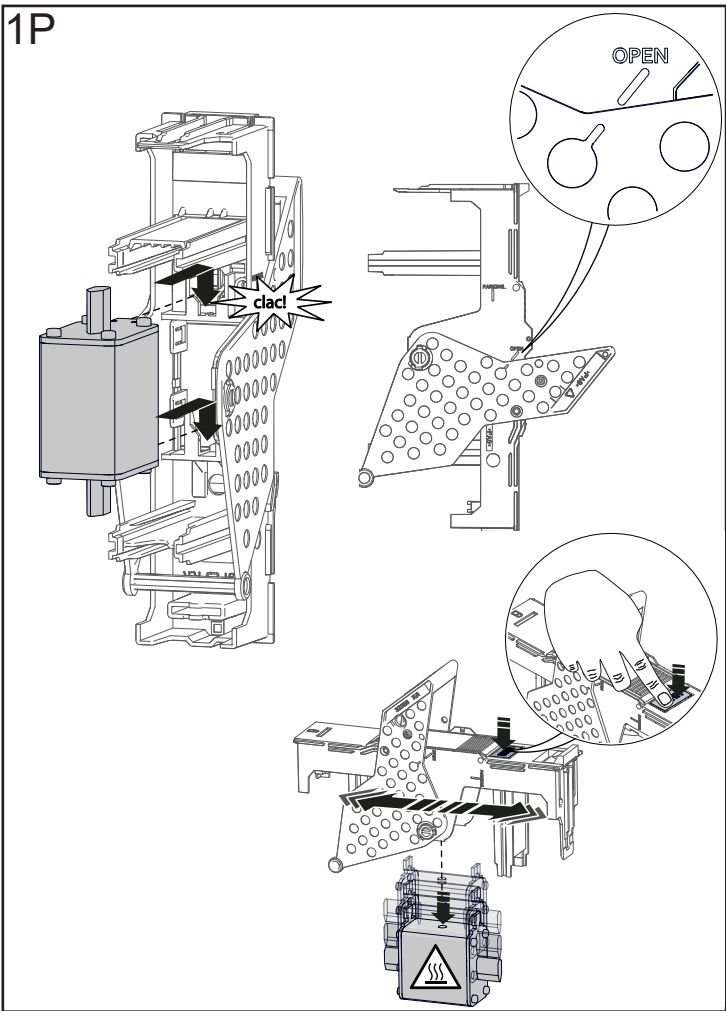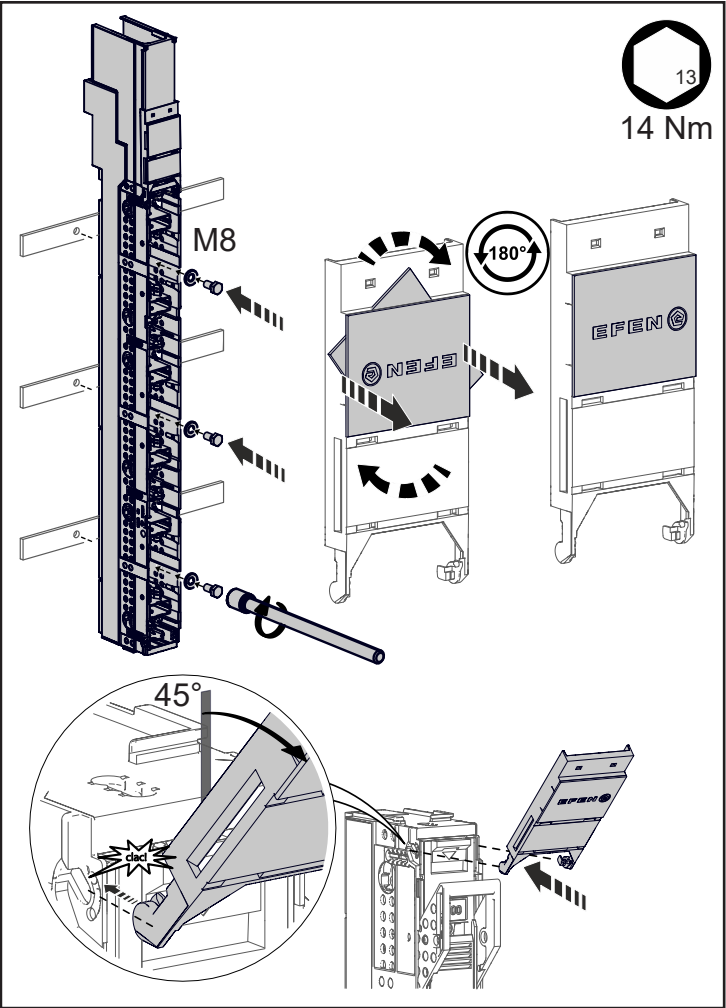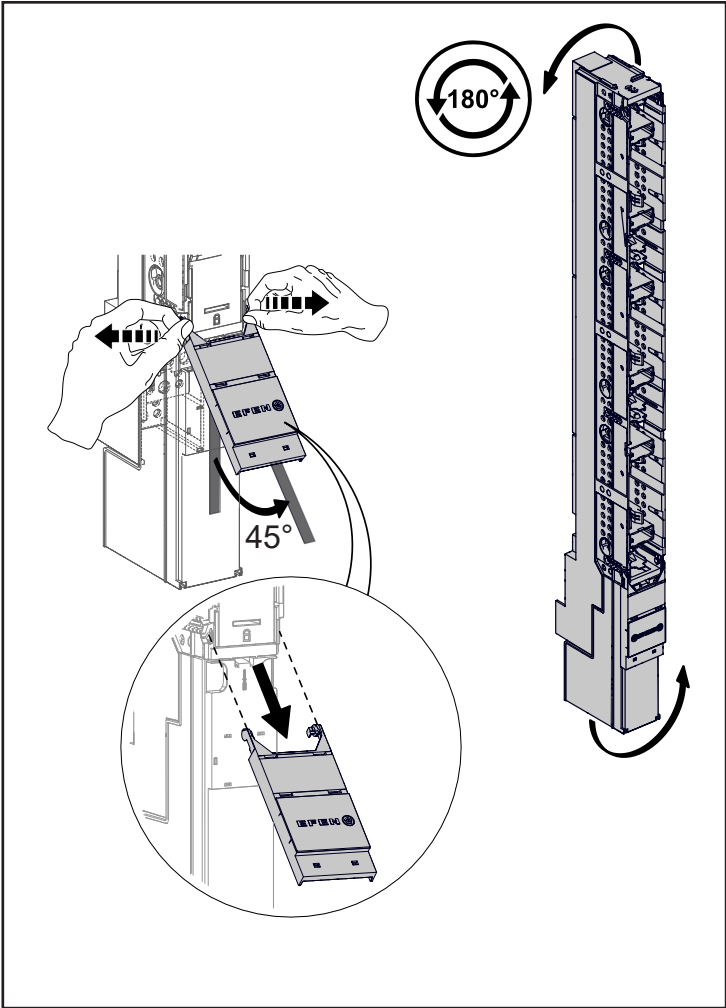

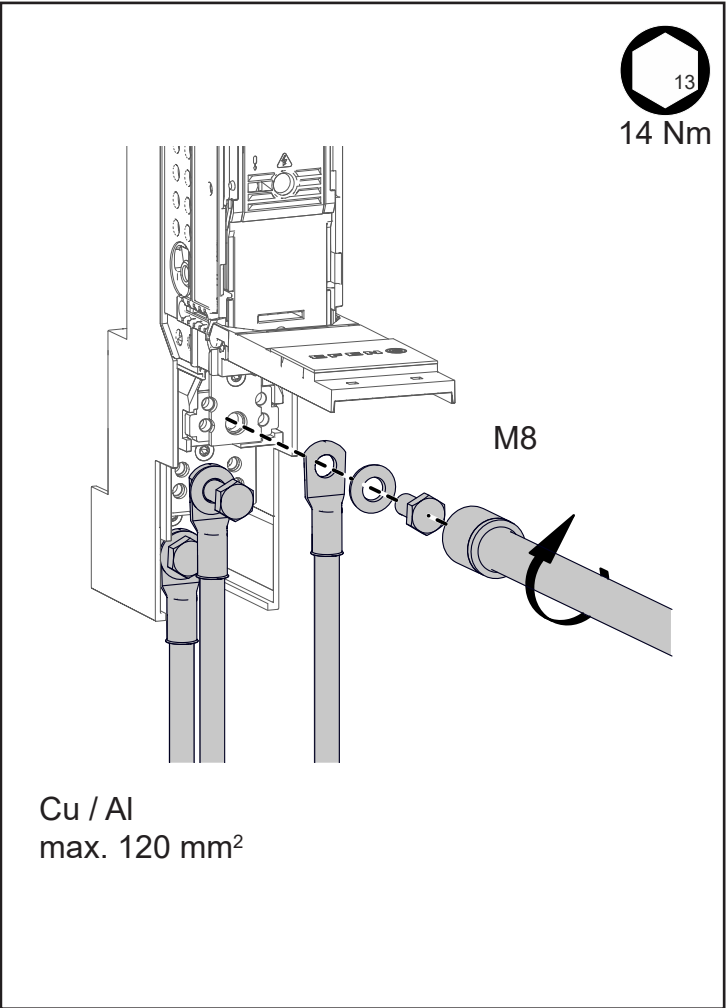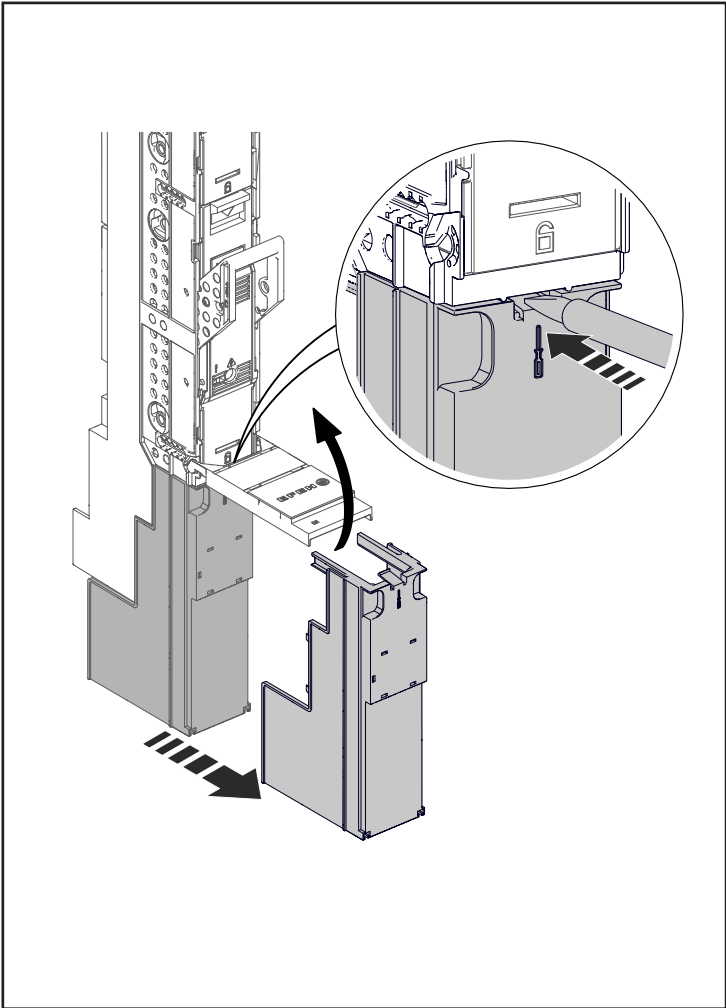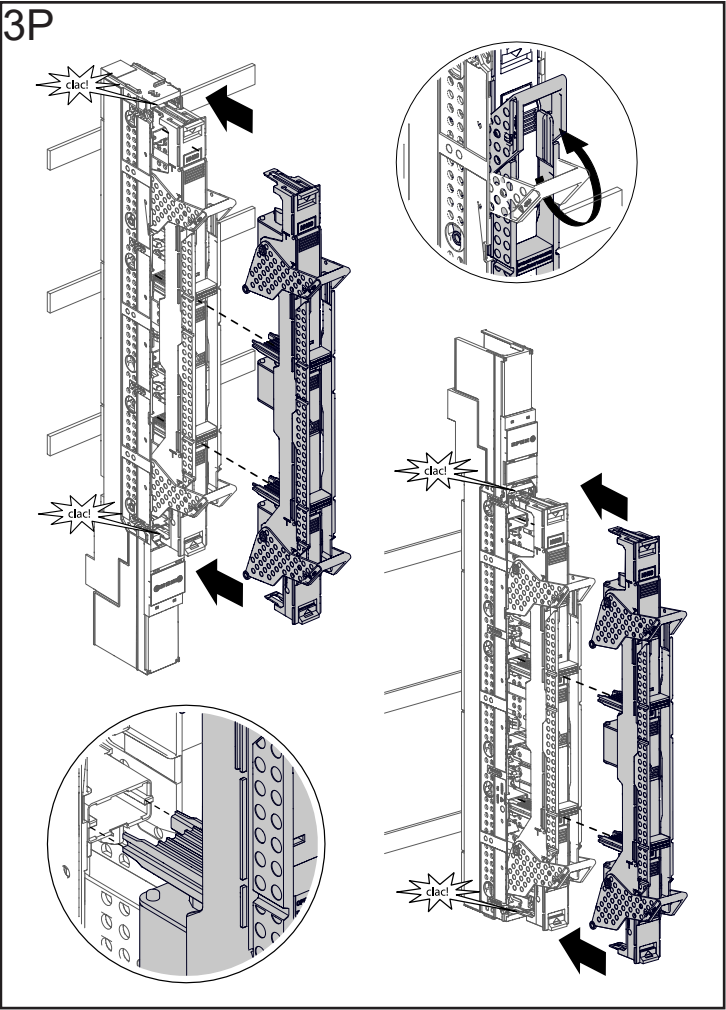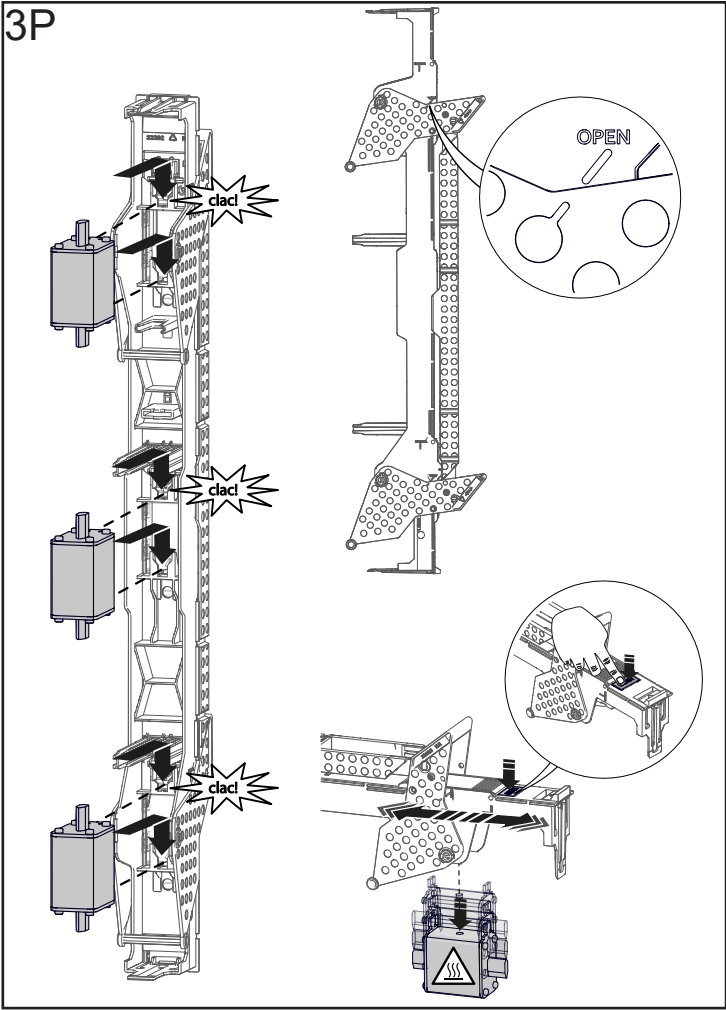


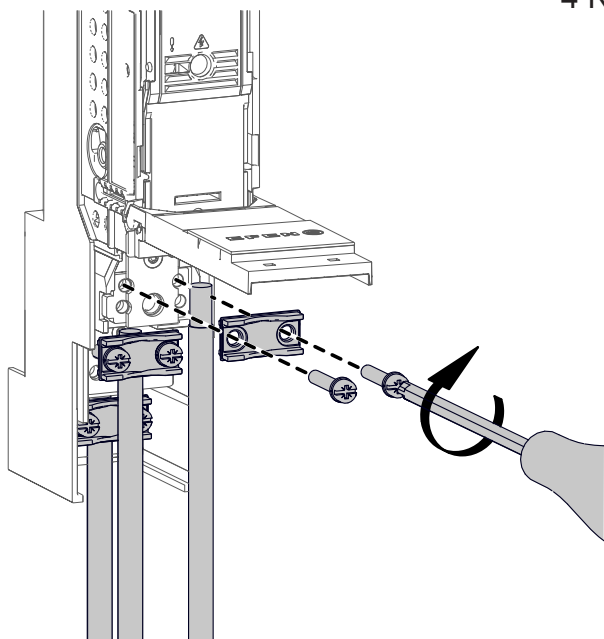


Cu
1,5 - 25 mm²

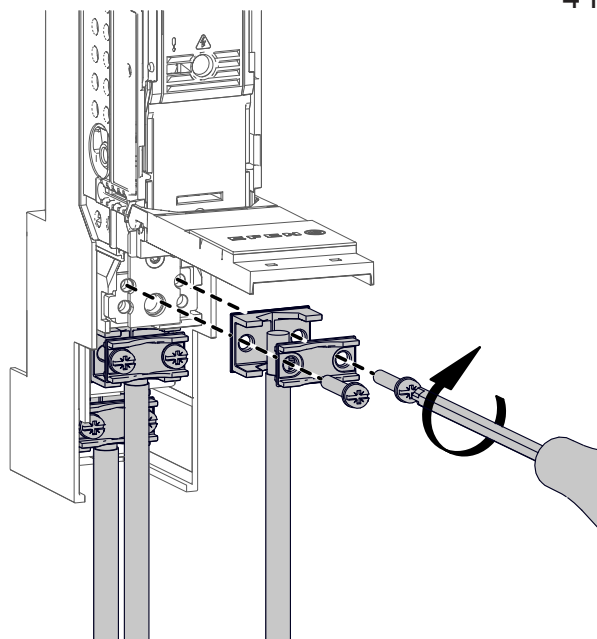

Cu / Al
1,5 - 95 mm²

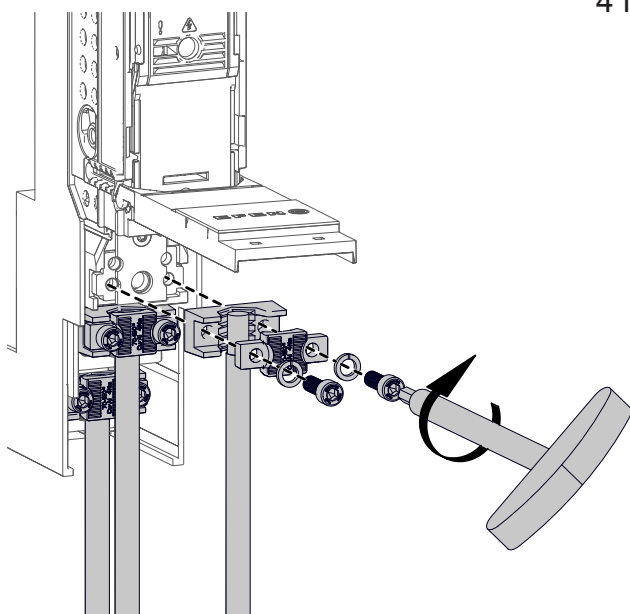


Cu / Al
70 - 150 mm²

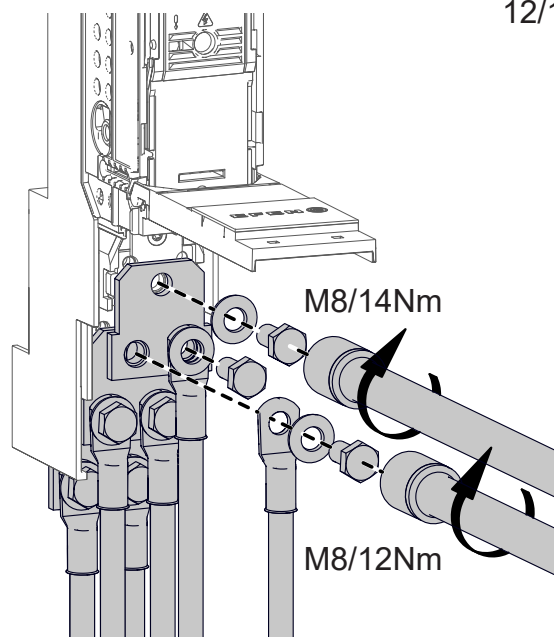

Cu / Al
max. 2 x 35 mm²




15 Nm

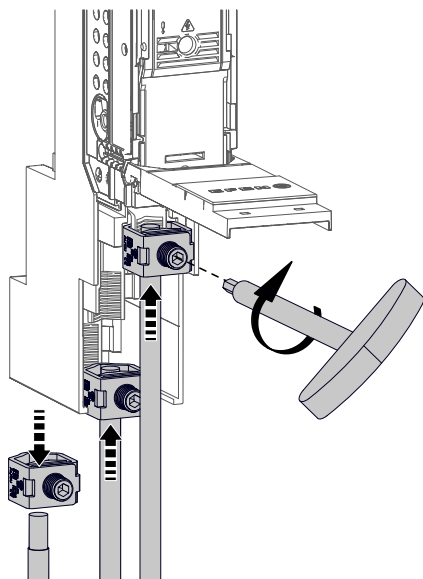

Cu / Al
6 - 95 mm²





5 Nm




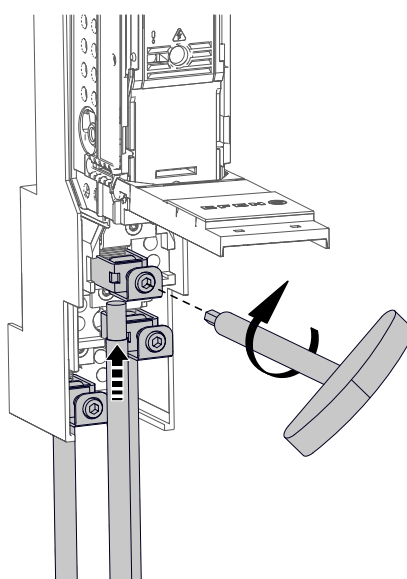


Cu
2,5 - 95 mm²




6 Nm

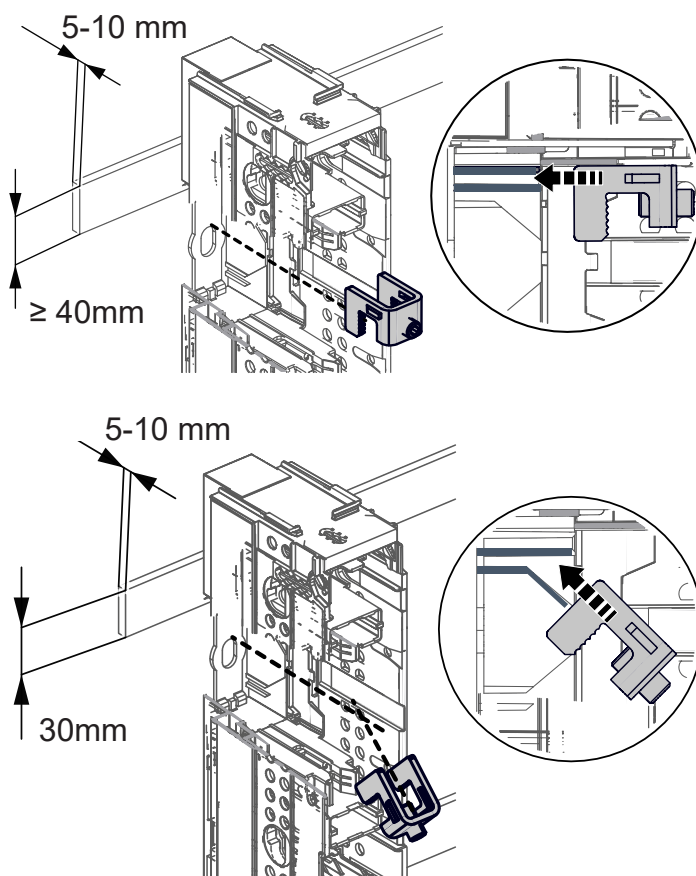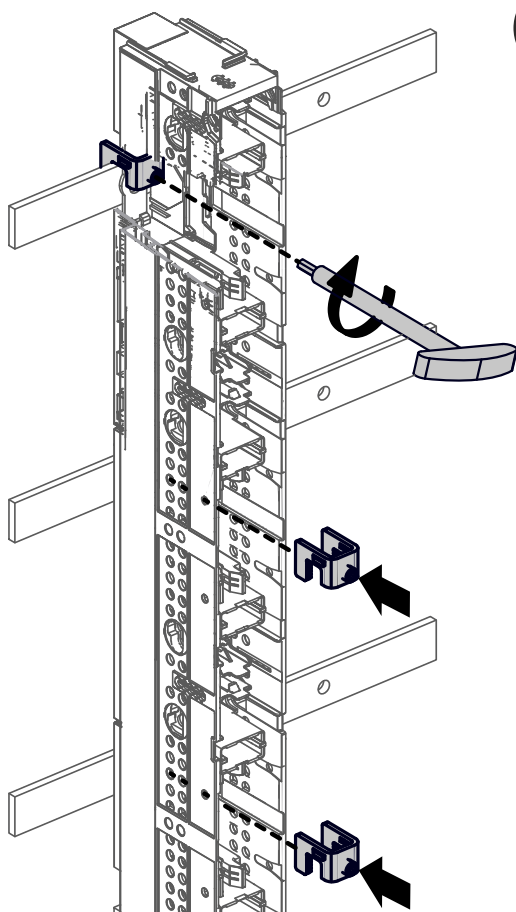


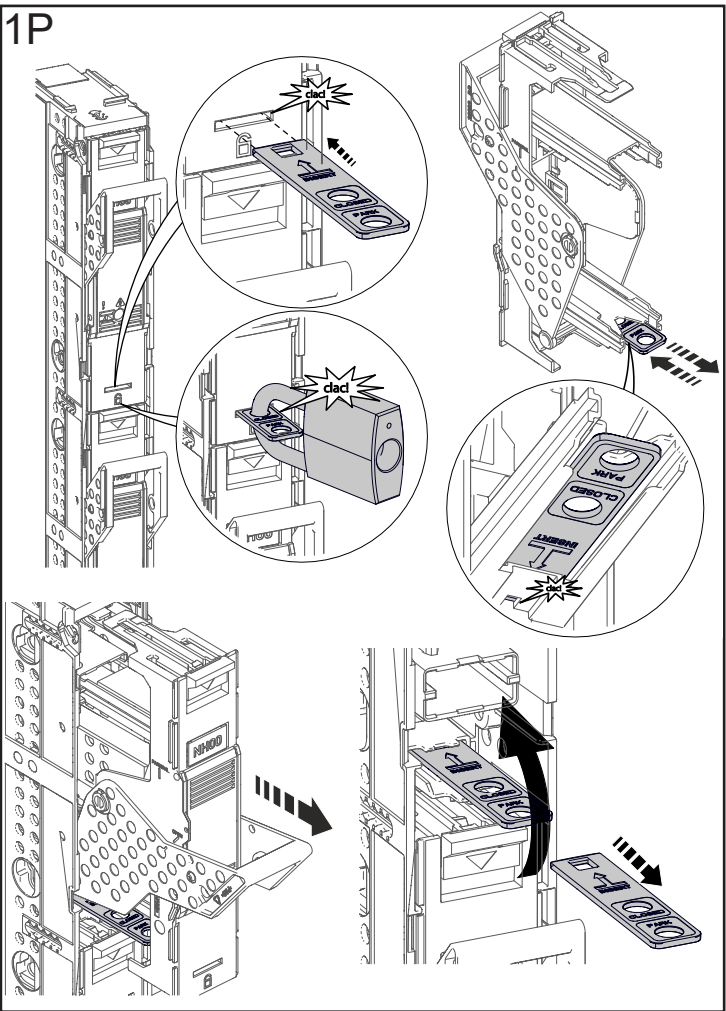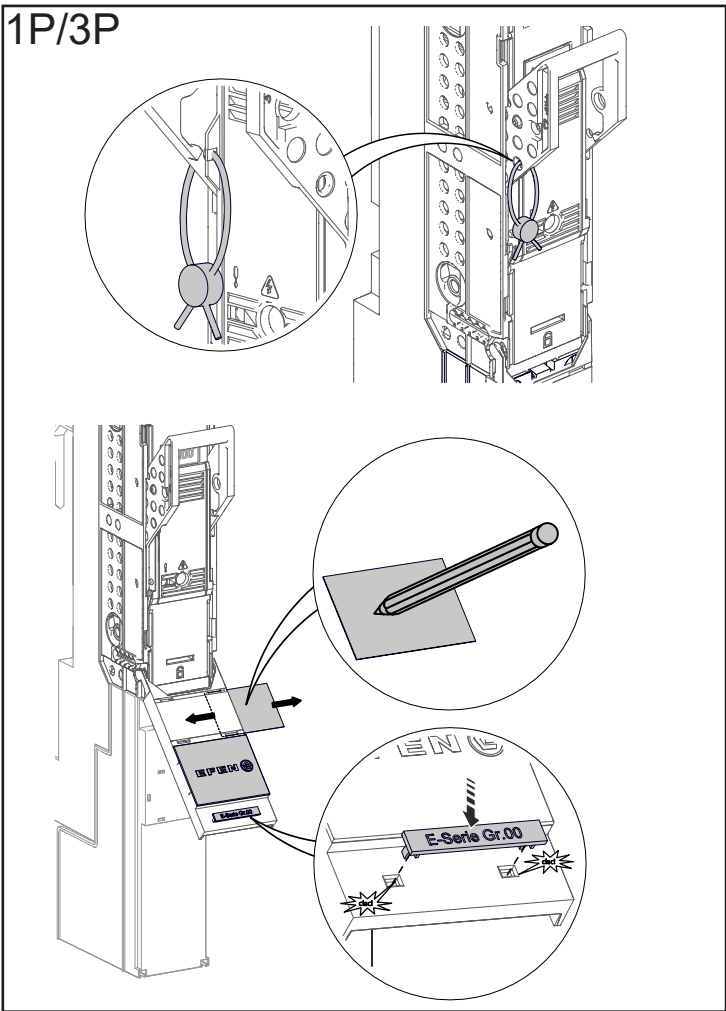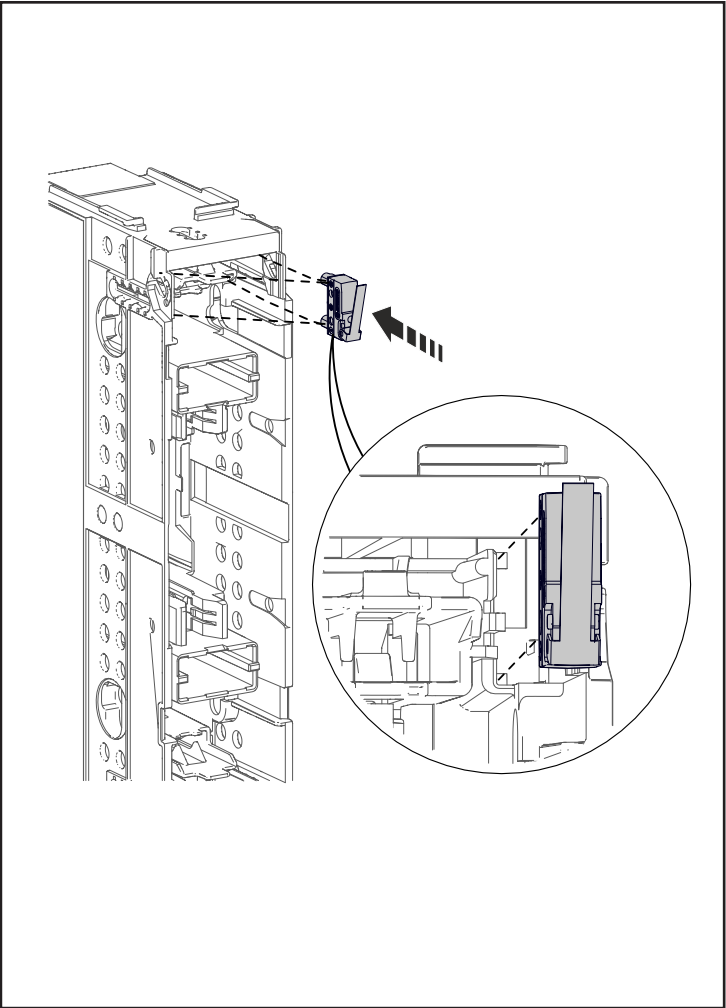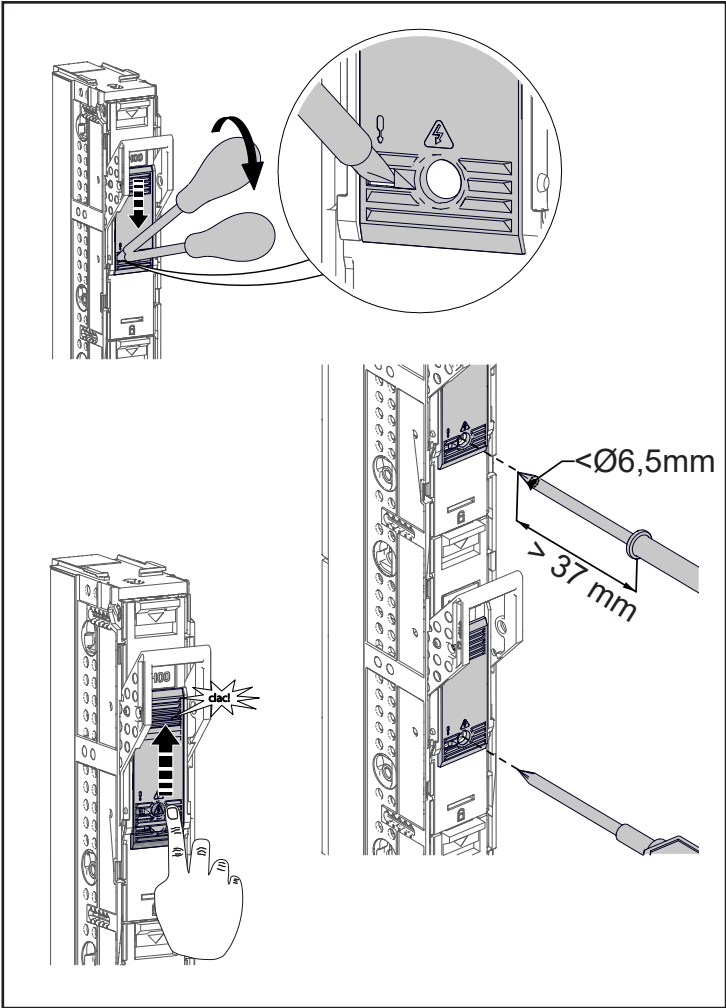



3P

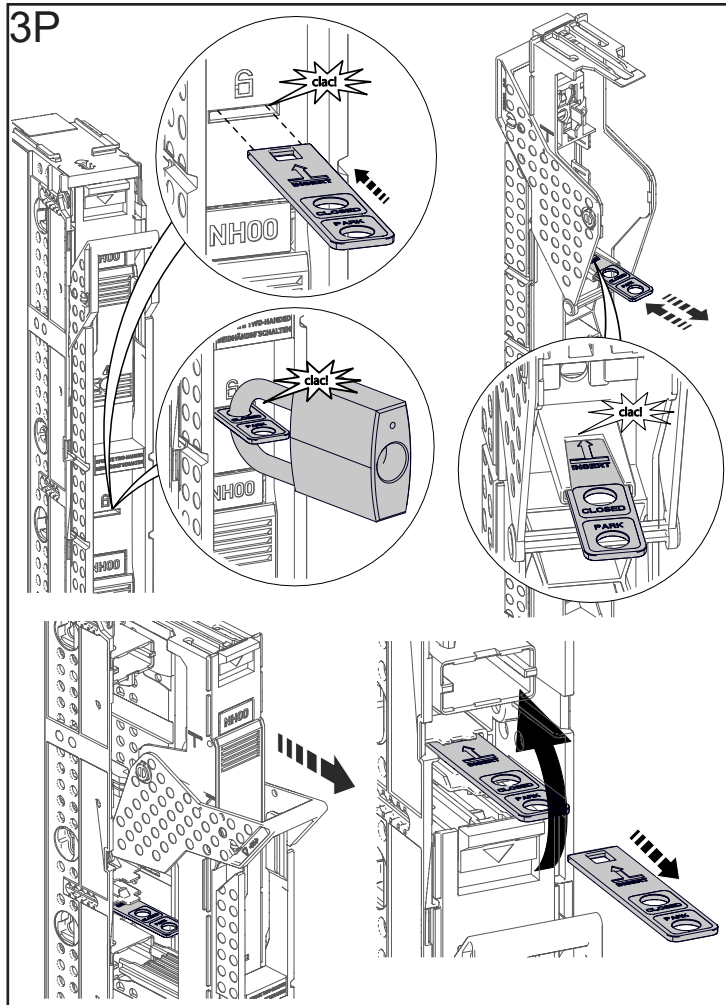

1P

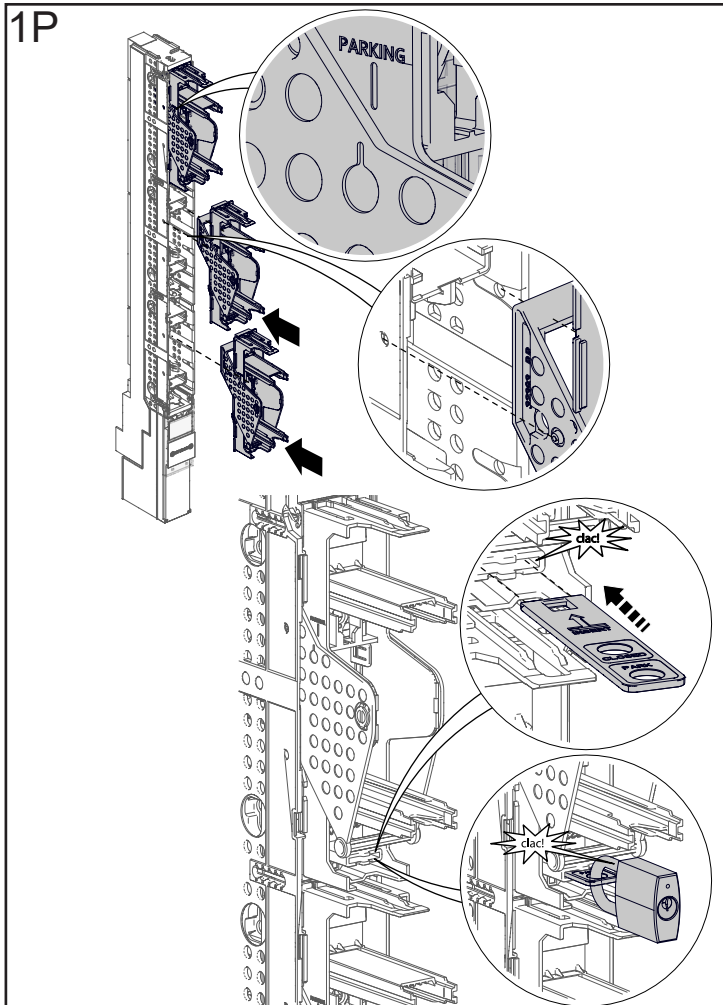

3P

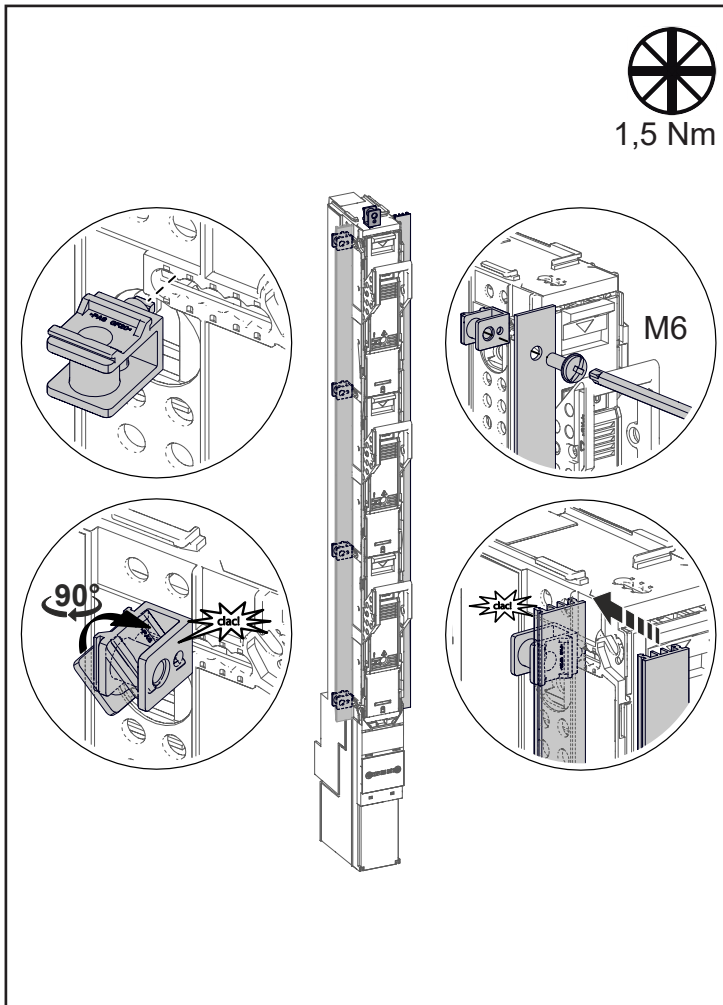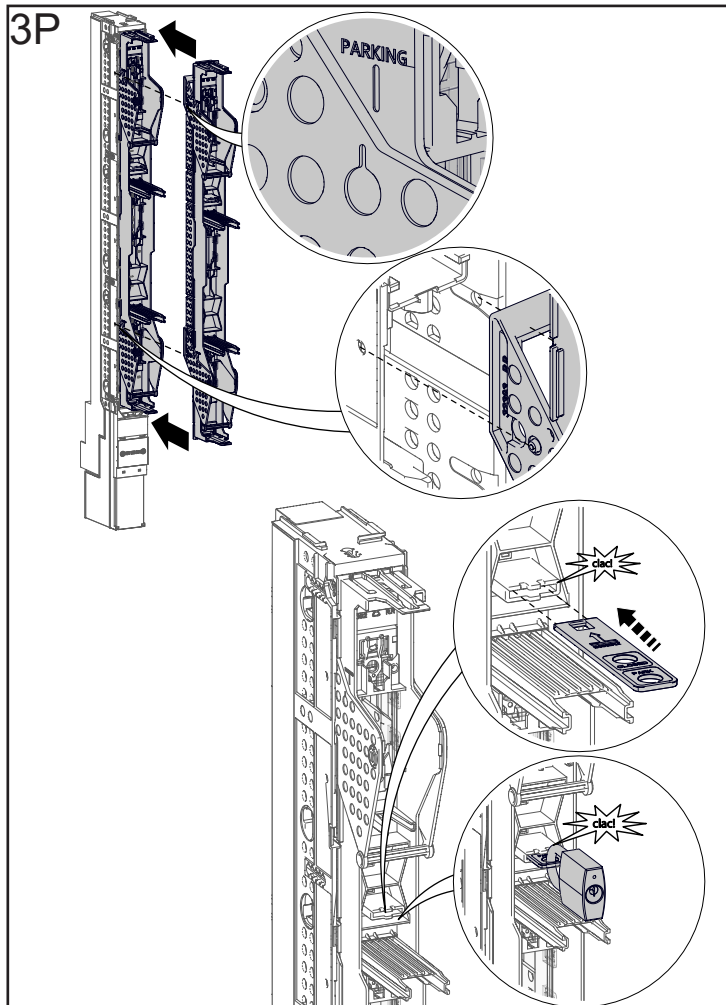


1,5 Nm

M6