


support de composant jeu de barres (32425)

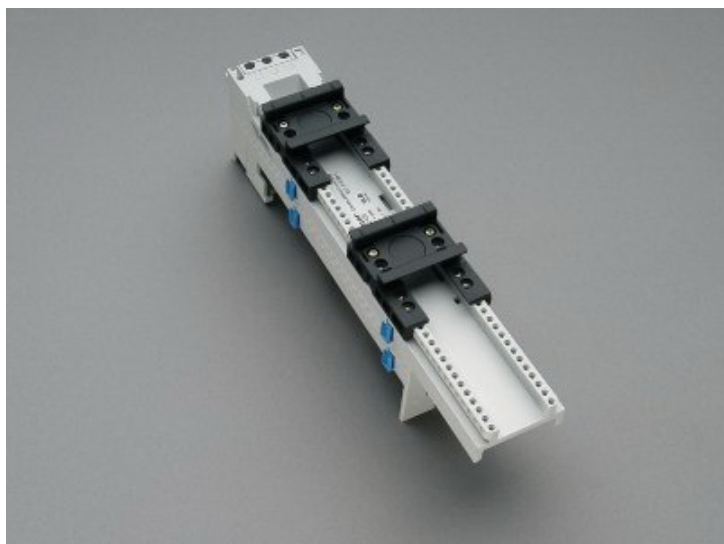

The picture may show a similar product.

Description

Référence **32425 000**

EQUES® 60Classic

support de composant jeu de barres

2 rails DIN réglables

45 x 260, avec partie supérieure amovible, sans connexion électrique

pour jeux de barres 12, 15, 20, 25, 30 x 5, 10 et barres profilées

avec CrossLink®Technology

Système

60Classic

Groupe de produits 05

Sous-groupe 17

Dimensions de l'emballage 4

EAN 4021267324254

ECLASS 6.1 27370304
ECLASS 7.1 27370304
ETIM 4.0 EC001531
ETIM 5.0 EC001531

Homologations

Normes

IEC 61439-1:2020
UL 508

Approbations

CSA , UL



for UL feeder circuits >250V

Type: EMC6000-L

UL file: E123577, UL category (for USA): NMTR <https://www.ul.com>
UL file: E123577, UL category (for Canada): NMTR7 <https://www.ul.com>
CSA file: 110285, CSA class: 3211-37 <https://directories.csa-international.org>
Homologation CCC: no certification required

Données techniques

Details IEC

Normes

IEC 61439-1:2020

Electrical data IEC

Tension assignée (IEC) CA: 690 V

rated isolation voltage U_i AC: 800 V

Tension assignée de tenue aux chocs U_{imp} : 6 kV

power dissipation of the article:

The power dissipation at a typical load of 80 % results to 0,0 W.

(The power dissipation at full load would be 0,0 W.)

Details UL

Normes

UL 508

for UL feeder circuits >250V

Electrical data UL

rated voltage (UL) AC: 600 V

rated frequency (UL): 50 / 60 Hz

Caractéristiques mécaniques

L x H x P: 45 x 260 x 75

Poids: 36,2 kg/100

pour jeux de barres: 12, 15, 20, 25, 30 x 5, 10 et barres profilées

Application notes

There must be a clearance of at least 12 mm above the article to remove it from the busbar system.


For compact mounting of complete motor circuits with commercially available switchgear and safe mechanical and electrical connection to the busbar system. In the test position, the structure locks and disconnects safely from the primary energy supply.

not applicable, since the product does not contain or carry any live parts or is not stressed in the case of a short-circuit

for UL feeder circuits >250V


Accessoires

accessories for mounting




32969 000
arrêt de rail DIN

further accessories



32947 000
rail DIN 45 mm
pour adaptateurs de jeux de barres



32964 000
module pour montage latéral pour adaptateurs de jeux de barres
encliquetable des deux côtés
9 x 200
pour: EMC60..



32979 000A
pièce de positionnement pour Eaton PKZ



32952 000A
pièce de positionnement pour Siemens S00 et S0



32940 000A
rail DIN 54 mm
pour adaptateurs de jeux de barres

<https://pim.woehner.de/FR/FR/1000042549>